

## Single Sheave Aluminium Suspension Block


With an automatic safety gate and steel side frames.

### Specification

<b>Outside Diameter:</b>	170mm
<b>Groove Width:</b>	65mm
<b>Root Diameter:</b>	100mm
<b>Weight:</b>	7kg
<b>SWL:</b>	4000kg

**Note: Also available with slip ring for earthwire earthing.**

All our blocks are stamped with Head Load SWL T2.

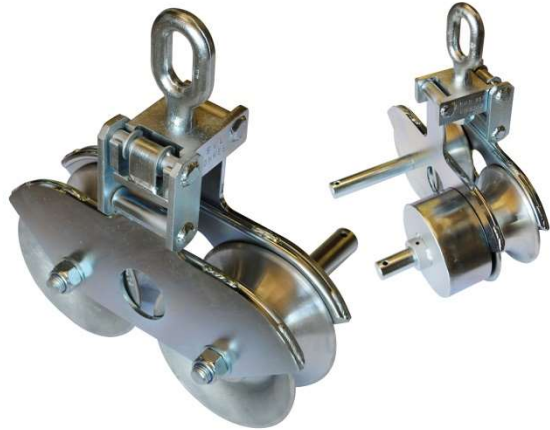

### Product No Description

D-717	Tandem Aluminium Sheave R/O Block
-------	-----------------------------------

## Swivel Sagging Block

Designed to fit tower cross arm to accept wire rope for sagging conductor.

### Specification

<b>Maximum Wire Rope Dia:</b>	24mm
<b>SWL:</b>	D-668-01:2000kg
	D-668: 3500kg
	D-668-02:5000kg

All our blocks are stamped with Head Load SWL T2.



### Product No Description


D-668	Swivel Sagging Block – M20
D-668-01	Swivel Sagging Block – M16
D-668-02	Swivel Sagging Block – M22

## Straight Sagging Block

### Specification

<b>Maximum Wire Rope Dia:</b>	16mm
<b>SWL:</b>	2000kg
<b>Weight:</b>	8kg

All our blocks are stamped with Head Load SWL T2.

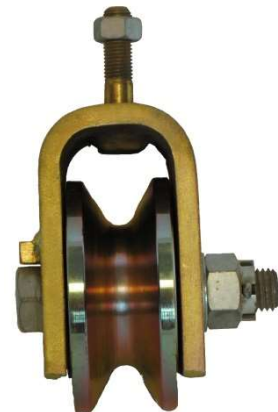

### Product No Description

D-670	Straight Sagging Block
-------	------------------------