


C-825 Portable Hydraulic Winching System

The CBS 825 is designed to provide a fully portable winching system, by breaking down into easily transportable modules. Ideally suited for overhead line stringing work such as ABC conductors, bare conductors or re-conductoring projects, it provides a flexible system suitable where access is restricted and ground disturbance is undesirable. The winch can be pole mounted or ground mounted using the optional frame. The C-825 Hydraulic Winch comprises of a strong lightweight pole mounting frame with securing chains and incorporates a hydraulic drive and control lever.

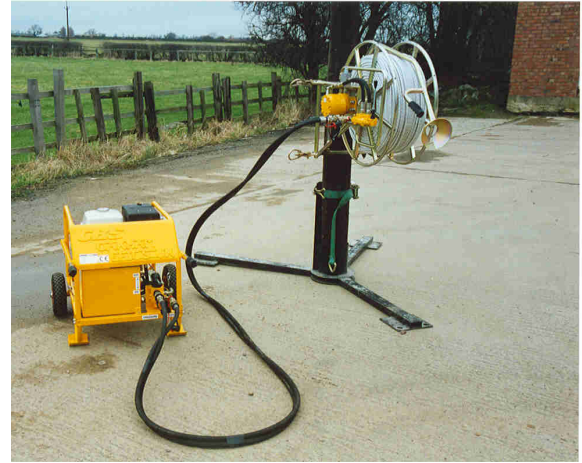

SPECIFICATION

Capacity:	1000kg Maximum Tension (approx) Average Tension 300kg
Speed Control:	0-100 metres/min Fail-safe, bi-directional section, creep and inching facility

C-1204-0843 Hydraulic Power Pack

This unit is powered by an air-cooled, 8hp petrol driven engine, delivering 15 litres/min at a working pressure of 200 bar from the hydraulic circuit. The circuit is protected with return line and suction filters. The unit is mounted on a robust, pneumatic wheeled, trolley. The unit is CE approved.

Height:	720mm
Length:	850mm
Width:	755mm
Weight:	107kg
Hydraulic Tank Capacity:	25 litres



ORDERING DETAILS


Product No	Description
C-825	Pole Mounted Hydraulic Winch
C-825-10	Layering Device (Manual)
C-1204-0843	Hyd Power Pack 8hp Std Flow 200 bar 15 litres/min
C-HYD-HA-08	Hose with couplings -
-007.0-01	7 metres long (2 off)

OPTIONAL EXTRAS

Product No	Description
C-821-02	Drum 700mm, fitted with 400 metres of 8mm diameter "Paraline" Rope.
C-821-03	Drum 700mm, fitted with 600 metres of 8mm diameter "Paraline" Rope.
C-A1-680-27	Split drum for retrieving old conductor
C-825-06	Grounding frame and anchor rods
C-825-07	Split drum (outboard type)
C-825-09	Carrying handle for Hyd Motor



C-825-06
Grounding Frame

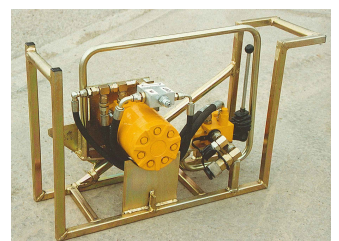

C-825-09
Carry Handle

For Further Information

Telephone No: +44(0) 1572 723665 • Fax No: +44 (0) 1572 756009
E-mail: sales@cbsproducts.com • Website: www.cbsproducts.com